


- WaveStream LED
- Recently Viewed Items
- Parking Garage
- TopTier LED
- Parking Garage

## VPL Valet LED

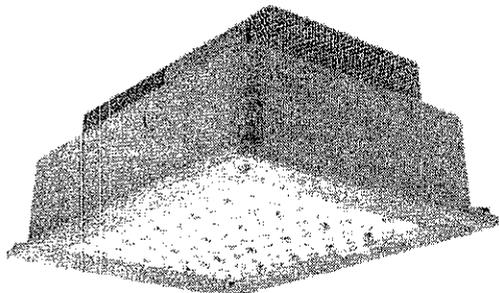

- One-piece, low-copper, die-cast aluminum housing
- Formed-aluminum faceplate secured via four stainless steel fasteners
- Choice of nine high-efficiency, patented AccuLED Optics™
- Standard in 4000K (+/- 275K) CCT and nominal 70 CRI
- Suitable for operation in -40°C to 40°C ambient environments
- 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation
- Proprietary circuit module withstands 10kV of transient line surge
- Four mounting configurations
- Five-year warranty

Configure this product      IES Calculator

Download this product's IES file

### Product Description

The Valet LED luminaires features a rugged and low profile housing construction incorporating patent pending, modular LED LightBAR™ technology. Through superior optical control, Valet delivers uniform and energy conscious illumination optimized to improve vehicular movement and pedestrian safety in parking structure applications. UL and cUL listed for wet locations.

#### Related Solutions



Parking Garage and Canopy



Parking Garage

#### Spec Sheets

- VPL Valet LED Recessed Product Configurator
- VPL Valet LED

#### IES Files

- IES files for Parking Garage: VPL VALET LED

#### Brochures

- Atlanta Airport Case Study
- Detroit Metropolitan Airport Success Story
- LED Outdoor Lighting
- Media Company Case Study Phase 1
- Media Company Case Study Phase 2

#### Incentives and Rebate Information

- Eaton's Incentive Finder

#### Instruction Sheets

- Installation Instruction Sheet for Valet LED

#### Revit Files

- McGraw-Edison VPL Valet LED J-Box Mount
- McGraw-Edison VPL Valet PBG LED



How can we help you?

Please enter your question

# McGraw

Project:	Type:
Comments:	

The Valet LED luminaries features a rugged and low profile housing construction incorporating patent pending, modular LED LightBAR™ technology. Through superior optical control, Valet delivers uniform and energy conscious illumination optimized to improve vehicular movement and pedestrian safety in parking structure applications. UL and cUL listed for wet locations



## Valet LED

Catalog Number	Object Type	Quantity	Quote Price	Extended Price
VPL-E01-LED-E1-GL2-WH-SM-LCF	Fixture	1		
MA1253	Replacement 10kV Surge Module	1		
RV/WG	Field Installed Wire Guard	1		

\*The price of Accessories is not included within the price. It will be added within the order management system.

### Configuration Detail:

Series	VPL = Valet
Number Of LightBARs	E01 = (1) 21 LED LightBAR
Lamp Type	LED = Solid State Light Emitting Diodes
Voltage	E1 = Electronic (120V - 277V)
Distribution	GL2 = Type II w/Glare Control
Color	WH = White
DIM = 0-10V Dimming Driver	None Selected
HA = 50C High Ambient Temperature	None Selected
Rating	
Number of Circuits	Single Circuit
Mounting	SM = Surface Mount
Rotated Optics	None Selected
TR = Tamper Resistant-Fasteners	None Selected
CRI/CCT	70 CRI / 4000K CCT (standard)
LCF = LightBAR Cover Plate	LCF = LightBAR Cover Plate
Battery	None Selected
Sensor	None Selected